



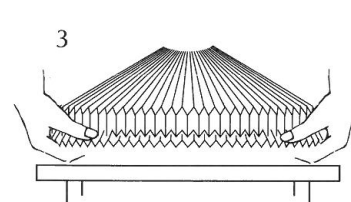



Instruktion

MONTAGE

1. Hvis det er første gang der skal monteres en LE KLINT loftslampe, skal selve stativet (model 902) pakkes ud og monteres på loftet først. Monter en tilledning i samleboxen. Monter krogen i loftet først. Krogen sidder midt i skærmen. Den lille øjeskrue med gevind hænges op i krogen.
2. Selve stativet med fatninger skubbes op på øjeskruen og det medfølgende rør skrues fast på øjeskruens gevind. Monter ledning fra el-boksen på stativet til el-udtag. Monter lyskilder.
3. Nu pakkes skærmen ud af kassen. Kanten rundt på skærmen udvides forsigtigt med begge hænder hele vejen rundt.
4. Til sidst lægges skærmen på en plan flade og trykkes let ned mod fladen for at udvide den det sidste.
5. Nu vendes skærmen om og sættes op mod loftet, rørstykket skal gå ud i midten af skærmen.
6. Den lille runde metalplade skrues nu fast på rørstykket for at holde skærmen på plads. Lampen er nu klar til brug.

NB: Vær opmærksom på at hvis loftet har lister eller anden dekoration kan skærmens kanter sætte sig fast når den trykkes op mod loftet.



LYS

Lampen har en lukket form som udsender et klart lys, uden at blænde.

Anbefalet max. wattage:

Model 23-35/50/60: LED-pære max. 2 x10 W, anbefalet 2 x 470 lumen

Benyt kronepære.

Model 23-100: LED-pære max. 2 x 20 W, anbefalet 2 x 800 lumen

NB: Ved for højt wattforbrug kan det give varmemproblemer i lampen og skærmen ødelægges.

VEDLIGEHOLD

Skærmen holdes ren ved aftørring med blød klud eller støvbørste.

Skulle der forvilde sig støv/insekter ind i skærmen kan denne afmonteres. Følg ovenstående instruktion.

Instruction

ASSEMBLY

1. First time users must first unpack and mount the twin socket frame to ceiling. Mount a cord in the connection box. Decide on the lampshade position and it's centre then attach the hook into the ceiling. Hang the small metal pin onto the hook.
2. Push up twin socket frame onto the metal pin and use metal tube to screw and fasten into place. Connect the electrical wire from the electrical output into the small box on the twin socket frame. Install light bulbs
3. Remove and unpack lampshade from box. Use both hands to gently extend and widen the rim of the shade
4. Place the shade right side up onto a flat surface and press lightly to completely expand the shade.
5. Turn the shade upside down and place up onto the ceiling ensuring the metal tube passes through the small hole in the shade.
6. Hold shade in place and firmly screw on small round metal cap onto the metal tube to fasten shade onto ceiling. Your ceiling lamp is now ready for use.

Note: position lampshade away from any openings or ceiling decorations to avoid the edges of the shade getting stuck or damaged when pressed up against the ceiling.

LIGHT

The lamp has a closed shape which emits a bright light without glare.

Recommended max. wattage:


Model 23-35/50/60: LED bulb max. 2 x10 W, recommended 2 x 470 lumens. Use small bulbs.

Model 23-100: LED bulb max. 2 x 20 W, recommended 2 x 800 lumens

NOTE: Exceeding the recommended wattage may result in excessive heat evolution and damage to the shade.

MAINTENANCE

Use a dust brush or soft cloth to clean the shade. If dust or insects collects inside the shade, the shade can be dismantled for cleaning. Reverse step 6 to dismantle for cleaning then follow steps 5 and 6 to re-attach shade.

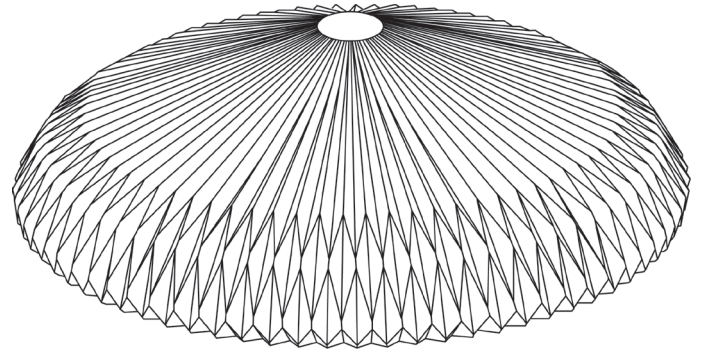

- INDHOLD
- Håndfoldet skærm, elophæng, montagekit
 - Instruktions omhandlende udpakning, montage og vedligeholdelse
- CONTENTS
- Hand folded shade, elec. hang-up, mounting kit
 - Instructions for unpacking assembly and maintenance.

LK 23/35, 50, 60, 100

LE KLINT

LOFTSLAMPE

LK 23/35 - Ø 35 cm, H 15 cm - max. 2 x 10 W
LK 23/50 - Ø 50 cm, H 16 cm - max. 2 x 10 W
LK 23/60 - Ø 60 cm, H 18 cm - max. 2 x 10 W
LK 23/100 - Ø 100 cm, H 24 cm - max. 2 x 20 W

Designet af: Le Klint Designteam

Designår: 2023

Producers af: LE KLINT A/S

CEILING LAMP

LK 23/35 - Diam. 52 cm, H 15 cm - max. 2 x 10 W
LK 23/50 - Diam. 65 cm, H 16 cm - max. 2 x 10 W
LK 23/60 - Diam. 70 cm, H 18 cm - max. 2 x 10 W
LK 23/100 - Diam. 80 cm, H 24 cm - max. 2 x 20 W

Designed by: Le Klint Designteam

Year of design: 2023

Production by: LE KLINT A/S



LE KLINT • Egestubben 13-17 • 5270 Odense N
www.leklint.com • leklint@leklint.dk

LE KLINT

LK 23