

# GRAU

## Falling Leaf

Deckeneinbau

Falling Leaf zentriert den Raum wie ein magisches Objekt. Ihre hochmoderne Linse ergießt ein schönes blendfreies Licht großzügig über den Tisch und passt sich durch Warm Dim Technologie der Atmosphäre an. Dimme die Lichtstimmung um mühelos mit dem Phasen-Drehdimmer oder via GRAU App.

## Farben

Farben

- Black
- Sand White
- Polished/Black
- Polished/White

Artikelnummer

- FLI1-310-00
- FLI1-310-05
- DL01-0
- DL01-1

## Dimensionen

Deckentopf  
Ø 8,5cm × 0,7cm



Höhe  
200 cm


Leuchtenkopf  
Ø 24cm × 6,8cm

## Body

Pendellänge	2 m
Einbautiefe	60 mm
Einbaudurchmesser	68 mm
Material	Aluminium
Oberfläche	Black, Sand White: Pulverbeschichtet Polished/Black, Polished/White: Poliert
Gewicht	1,7 kg
Montageart	Deckeneinbau
Nennspannung	220 – 240 V
Leistungsaufnahme	16 W
Leuchteneffizienz	88 lm/W
Anschlussleitung (Ader - Zahl)	2
Schutzklasse	II
EU-Konformität	CE

# GRAU

## Lichtkurve

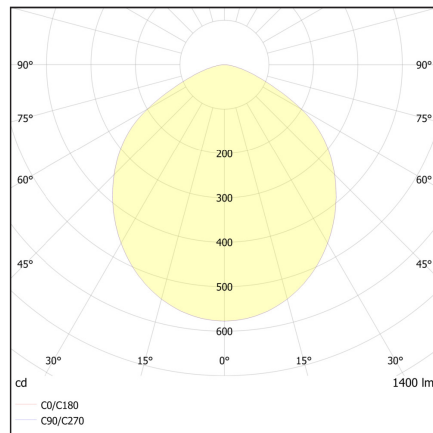

## Licht

Leuchtmittel	LED
Leuchtenlichtstrom	1400lm
Farbwiedergabeindex	CRI > 90
Lichtaustritt	Direkt
Abstrahlwinkel	104°
Lichtverteilung	Symmetrisch
Farbtemperatur	2700 - 2200K
Lichtfarbe	Warmweiß
Dimmbar	Ja
Art der Dimmung	Phasenabschnitt
Warm Dim	Ja
GRAU App Upgrades möglich	Ja
Umbau auf DALI möglich	Ja
Energieeffizienz (direkt)	D

# GRAU

## Falling Leaf


Ceiling-mounted  
Recessed

Falling Leaf centres a space like a magical object. With its state-of-the-art lens, this iconic lamp beams beautiful, adaptable, and de-glared light. Adjust color temperature and brightness with integrated WarmDim. Control via rotary phase dimmer or via the GRAU App.

## Colors

Color	SKU
● Black	FLI1-310-00
● Sand White	FLI1-310-05
● Polished/Black	DL01-0
● Polished/White	DL01-1

## Dimensions

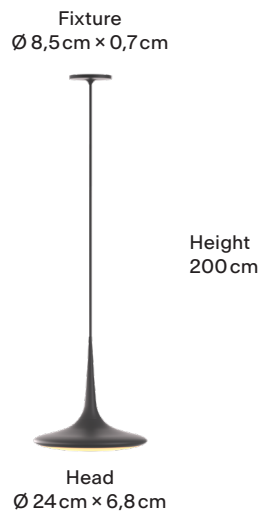


## Body

Pendant length	2 m
Mounting depth	60 mm
Mounting diameter	68 mm
Material	Aluminum
Surface	Black, Sand White: Powder-coated Polished/Black, Polished/White: Polished
Weight	1,7 kg
Mounting type	Ceiling-mounted (recessed)
Rated voltage	220 – 240 V
Power consumption	16 W
Luminaire efficiency	88 lm/W
Connection cable (number of cores)	2
Protection class	II
This Product is CE conform	CE

# GRAU

## Light Curve

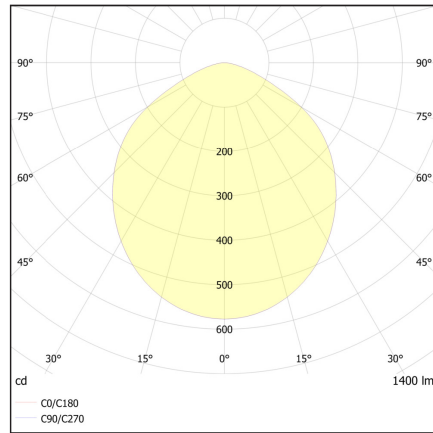

## Light

Light source	LED
Luminous flux	1400lm
Color rendering index	CRI > 90
Light emission	Direct
Beam angle	104°
Light distribution	Symmetric
Color temperature	2700 - 2200K
Light color	Warm White
Dimmable	Yes
Type of dimming	Phase rotary dimmer
Warm Dim	Yes
GRAU App upgrades possible	Yes
Conversion to DALI possible	Yes
Energy efficiency (direct light)	D