

GRAU

Flying

Eine schwebende Lichtscheibe flutet den Raum mit goldenem Licht. Flying ist maximal flexibel in Pendelhöhe und Neigung, so wie vielseitig in ihrer Lichtverteilung. Verändere die Lichtfarbe und Helligkeit per GRAU App und nutze Flying's universellen Einsatz in Raum- und Tischausleuchtung.

Farben

Farben	Artikelnummer
○ White	XS33-0
● Black	XS33-1
● Rose	XS33-3
● Sand White	XS33-5

Dimensionen




Body

Pendellänge	0,35–1,65m
Maße Verpackung (L × B × H)	60 cm × 64 cm × 13 cm
Material	Aluminium
Oberfläche	Pulverbeschichtet
Gewicht	7 kg
Höhenverstellbar	Ja
Montageart	Deckenaufbau
Nennspannung	220–240V
Leistungsaufnahme	50 W
Leuchteneffizienz	96lm/W
Anschlussleitung (Ader-Zahl)	3
Schutzklasse	I
EU-Konformität	CE

GRAU

Lichtkurve

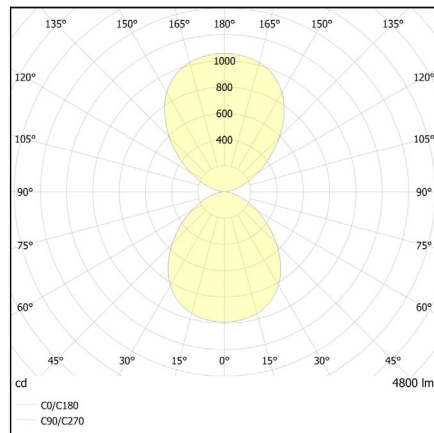

Licht

Leuchtmittel	LED
Leuchtenlichtstrom	4800 lm
Direkter Farbwiedergabeindex	CRI > 90
Indirekter Farbwiedergabeindex	CRI > 90
Lichtaustritt	50% direkt / 50% indirekt
Abstrahlwinkel	70°
Lichtverteilung	Symmetrisch
Farbtemperatur	3500 - 2200K
Lichtfarbe	Neutralweiß - Warmweiß
Dimmbar	Ja
Art der Dimmung	GRAU App
Warm Dim	Ja
Color Tune	Ja
Kompatibilität mit Casambi	Ja
GRAU App integriert	Ja
Umbau auf DALI möglich	Ja
Energieeffizienz (direkt)	G

GRAU

Flying

A floating disc that suffuses your space with light. Flying is a flexible delight, adjustable in height, angle, brightness, colour temperature, and light distribution. Let Flying light your room or table. Adjust brightness and colour temperature via the GRAU App.

Colors

Color	SKU
○ White	XS33-0
● Black	XS33-1
● Rose	XS33-3
● Sand White	XS33-5

Dimensions




Body

Pendant length	0,35 – 1,65m
Packaging dimensions (L × W × H)	60 cm × 64 cm × 13 cm
Material	Aluminum
Surface	Powder-coated
Weight	7 kg
Height adjustable	Yes
Mounting type	Ceiling-mounted (surface)
Rated voltage	220 – 240V
Power consumption	50 W
Luminaire efficiency	96lm/W
Connection cable (number of cores)	3
Protection class	I
This Product is CE conform	CE

GRAU

Light Curve

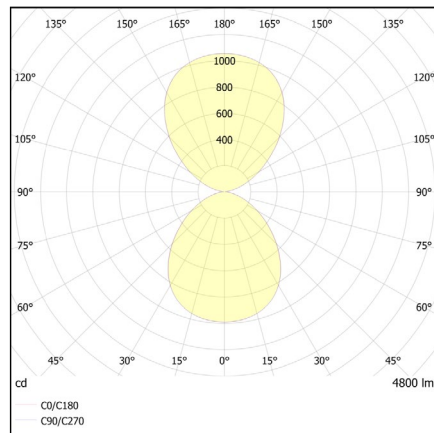

Light

Light source	LED
Luminous flux	4800 lm
Direct color rendering index	CRI > 90
Indirect color rendering index	CRI > 90
Light emission	50% direct / 50% indirect
Beam angle	70°
Light distribution	Symmetric
Color temperature	2200 - 3500 K
Light color	Warm White - Neutral white
Dimmable	Yes
Type of dimming	GRAU App
Warm Dim	Yes
Color Tune	Yes
Compatibility with Casambi	Yes
GRAU App integrated	Yes
Conversion to DALI possible	Yes
Energy efficiency (direct)	D
Energy efficiency (indirect)	D