

GRAU


Xt-a Plus T

Xt-a Plus T ist die hervorragende Lichtlösung für Co-Working in offener Architektur. Ihre hochwertige Form integriert die maximal effiziente OSA Technologie, die das Licht blendfrei und präzise lenkt und ausstrahlt.

Farben

Farben	Artikelnummer
● Satin / Black	GX94-0
○ Satin / White	GX94-1
● Black / Black	GX94-2
○ White / White	GX94-3

Dimensionen

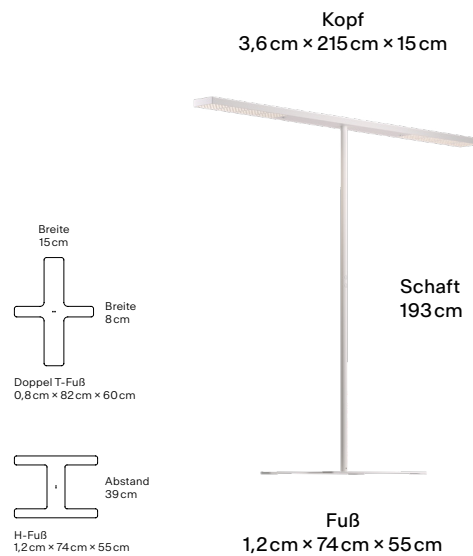


Body

Maße Verpackung (L × B × H)	250 cm × 17 cm × 20 cm
Material	Aluminium
Oberfläche	Satin: Eloxiert Black, White, Titan: Pulverbeschichtet
Gewicht	17kg
Montageart	Freistehend
Nennspannung	220 – 240V
Leistungsaufnahme	2 × 98W
Leuchteffizienz	125lm/W
Länge Anschlussleitung	2,9m
Schutzklasse	I
EU-Konformität	CE

GRAU

Lichtkurve

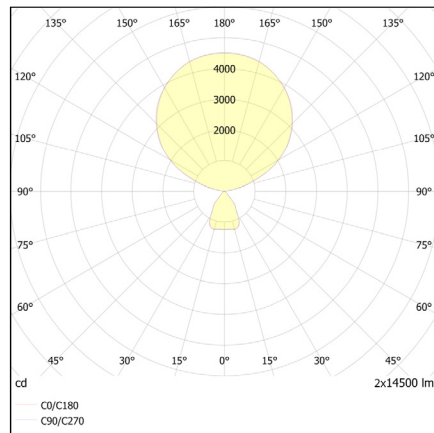

Licht

Leuchtmittel	LED
Leuchtenlichtstrom	2×14500lm
Direkter Farbwiedergabeindex	> 80
Indirekter Farbwiedergabeindex	> 80
Lichtaustritt	11% direkt / 89% indirekt
Lichtverteilung	Symmetrisch
Mittlere Lebensdauer LED	50.000h
Farbtemperatur	3500 K
Lichtfarbe	Neutralweiß
Dimmbar	Ja
Art der Dimmung	Integrierter Taster
Bewegungssensor	Ja
Reichweite des Bewegungssensors	2m
Konstantlichtregelung	Ja
Sensorik abschaltbar	Ja
Fernbedienung im Lieferumfang enthalten	Ja
Schwarmfunktion	Optional
Energieeffizienz (direkt)	C
Energieeffizienz (indirekt)	B

GRAU


Xt-a Plus T

Xt-a Plus T is the high efficiency solution for co-work situations in open-plan architecture. Its high-quality form integrates our patented OSA grid system for precise, efficient, and glare-free illumination.

Colors

Color	SKU
● Satin / Black	GX94-0
○ Satin / White	GX94-1
● Black / Black	GX94-2
○ White / White	GX94-3

Dimensions

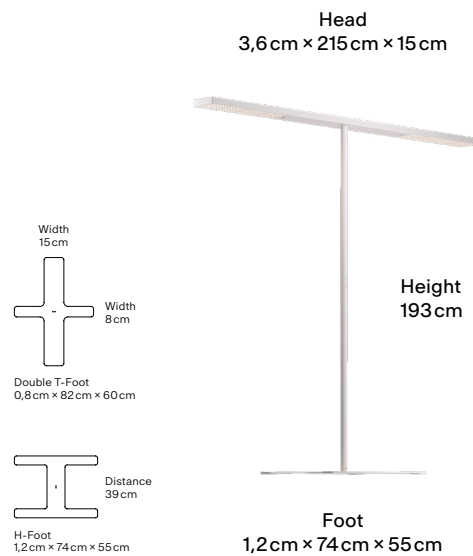


Body

Packaging dimensions (L x W x H)	250 cm × 17 cm × 20 cm
Material	Aluminum
Surface	Satin: Anodized Black, White, Titan: Powder-coated
Weight	17kg
Mounting type	Floor
Rated voltage	220 – 240V
Power consumption	2 × 98W
Luminaire efficiency	125lm/W
Length of connection cable	2,9m
Protection class	I
This Product is CE conform	CE

GRAU

Light Curve

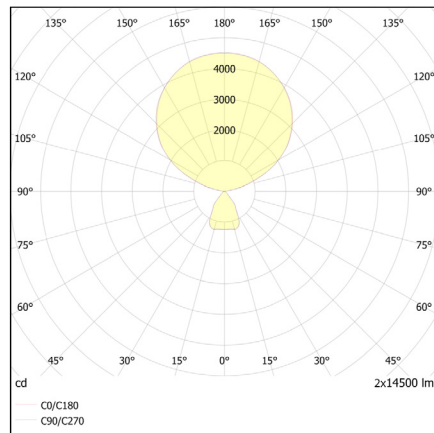

Light

Light source	LED
Luminous flux	2×14500lm
Direct color rendering index	> 80
Indirect color rendering index	> 80
Light emission	11% direct / 89% indirect
Light distribution	Symmetric
Average LED life	50.000h
Color temperature	3500 K
Light color	Neutral White
Dimmable	Yes
Type of dimming	Integrated pushbutton
Motion sensor	Yes
Range of the motion sensor	2m
Constant Light Regulator	Yes
Sensor system can be switched off	Yes
Remote control included	Yes
Swarm function	Optional
Energy efficiency (direct light)	C
Energy efficiency (indirect light)	B