





bu6-600-G5-wm / bu6-600-G5-wa (-u) / bu6-600-G5-p(-u)

DECKEN-, WAND- UND PENDELLEUCHTE CEILING, WALL AND PENDANT LUMINAIRE


TECHNISCHE DATEN TECHNICAL DATA		CE
Hersteller <i>Manufacturer:</i>	mawa	
Artikel-Nr. <i>Article No.:</i>	bu6-600-G5-wm bu6-600-G5-wa /-wa-u bu6-600-G5-p /-p-u	
Spannung <i>Voltage:</i>	220 – 230 V	
Netzfrequenz <i>Power frequency:</i>	50/60 Hz	
Schutzklasse <i>Protection class:</i>	I	
Schutzgrad <i>Degree of protection:</i>	IP20	
Downlight Leuchtmittel <i>Light source:</i>	65 W / 350 mA	
Uplight Leuchtmittel <i>Light source:</i>	18 W / 500 mA	
Dimmung <i>Dimming:</i>	1–10 V, DALI, phasendimmbar oder Push 1-10 V, DALI, phase-dimmable or Push	
EEL:	A++ – A	

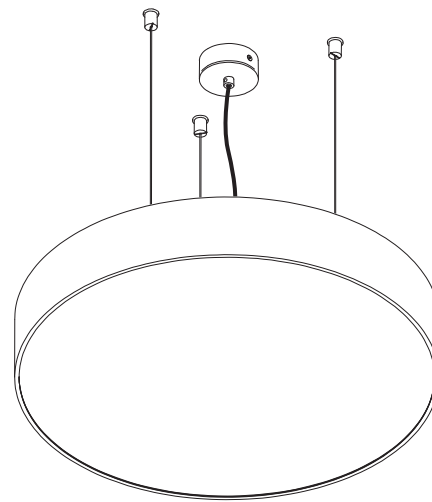


bu6-p /-p-u

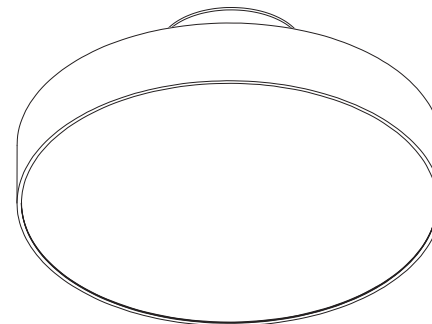


bu6-wa /-wa-u

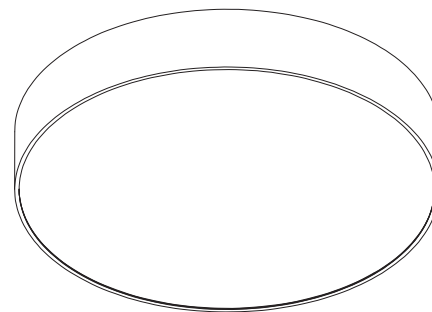

bu6-wm

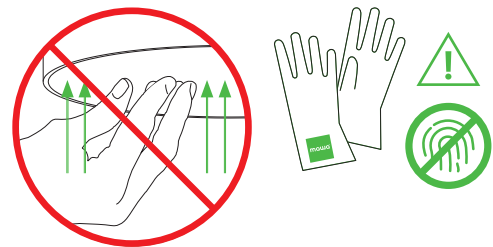

SCHALTPLAN MIT UPLIGHT WIRING DIAGRAM INCL. UPLIGHT

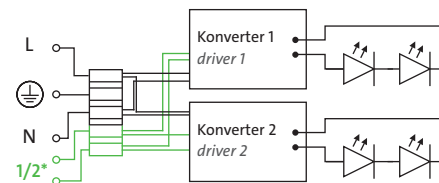

* 1. Push / 1-10V + / DALI 1
2. 1-10V - / DALI 2


WICHTIG IMPORTANT

Montage nur durch einen autorisierten Elektroinstallateur! Niemals unter Spannung den Sekundäranschluss herstellen oder lösen! Die Lichtquelle dieser Leuchte darf nur vom Hersteller, einem von ihm beauftragten Servicetechniker oder einer vergleichbar qualifizierten Person ersetzt werden.

Mounting only by an authorized electrician! Never connect or disconnect the secondary connection under voltage! Light source of luminaire is allowed to be replaced by manufacturer, a service technician commissioned by manufacturer or a person with equivalent qualifications only.

! Achtung: Befestigungselemente müssen den Gegebenheiten vor Ort entsprechend ausgewählt werden! Nur zur Installation außerhalb des Handbereichs vorgesehen.
Attention: Wall fixtures have to be chosen according to local conditions! Only to be installed outside arm's reach.

SCHALTPLAN WIRING DIAGRAM BLUETOOTH DIMMER (CBU-TED/-ASD)

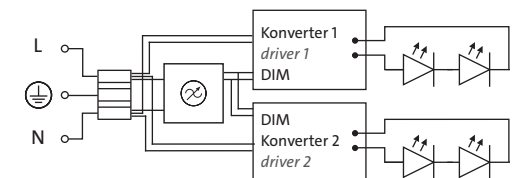


CASAMBI
READY



bu6-600-G5-wm


DECKEN- UND WANDLEUCHE CEILING AND WALL LUMINAIRE

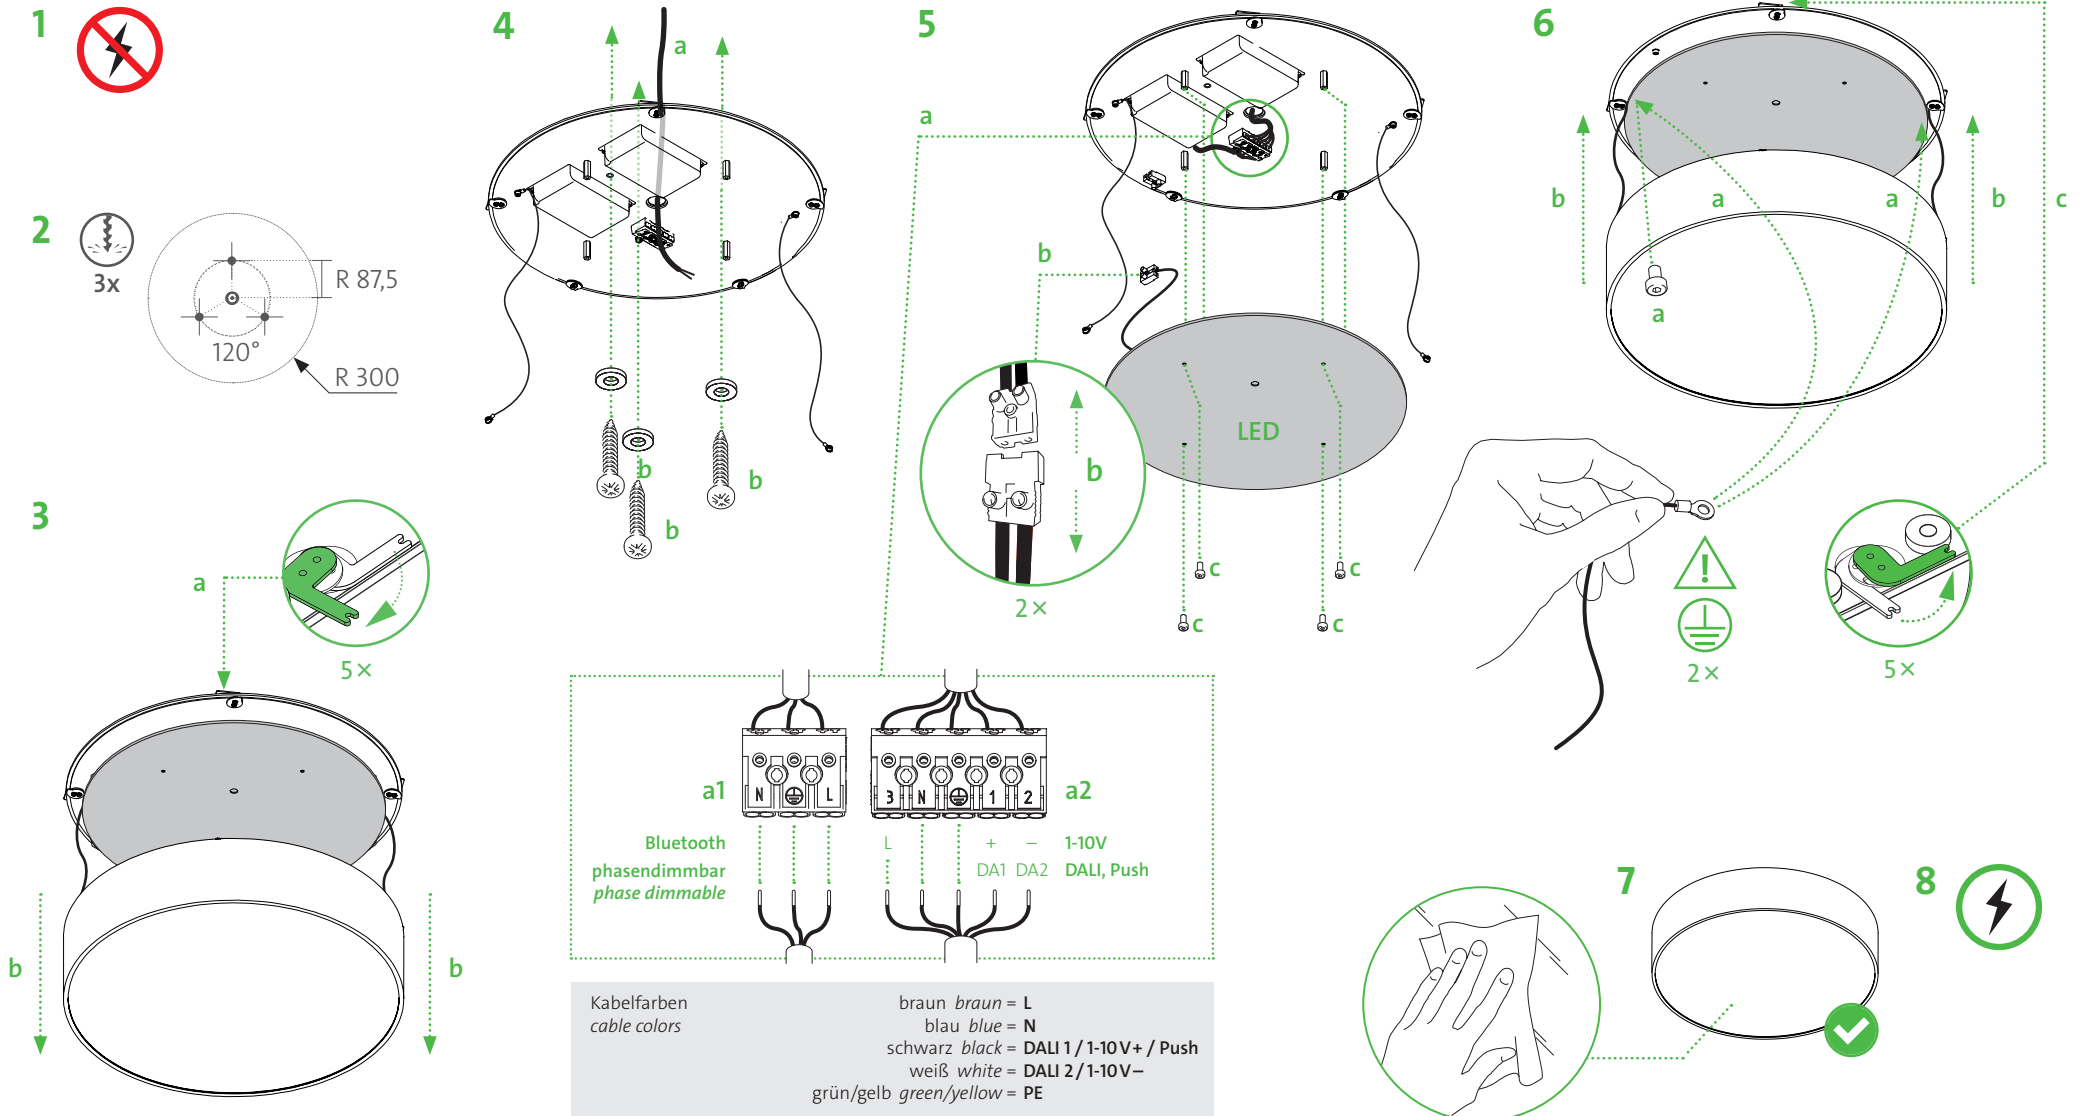

We are pleased that you have decided in a favour of mawa light.

bu6-600-G5-wa/-wa-u



DECKENLEUChte CEILING LUMINAIRE

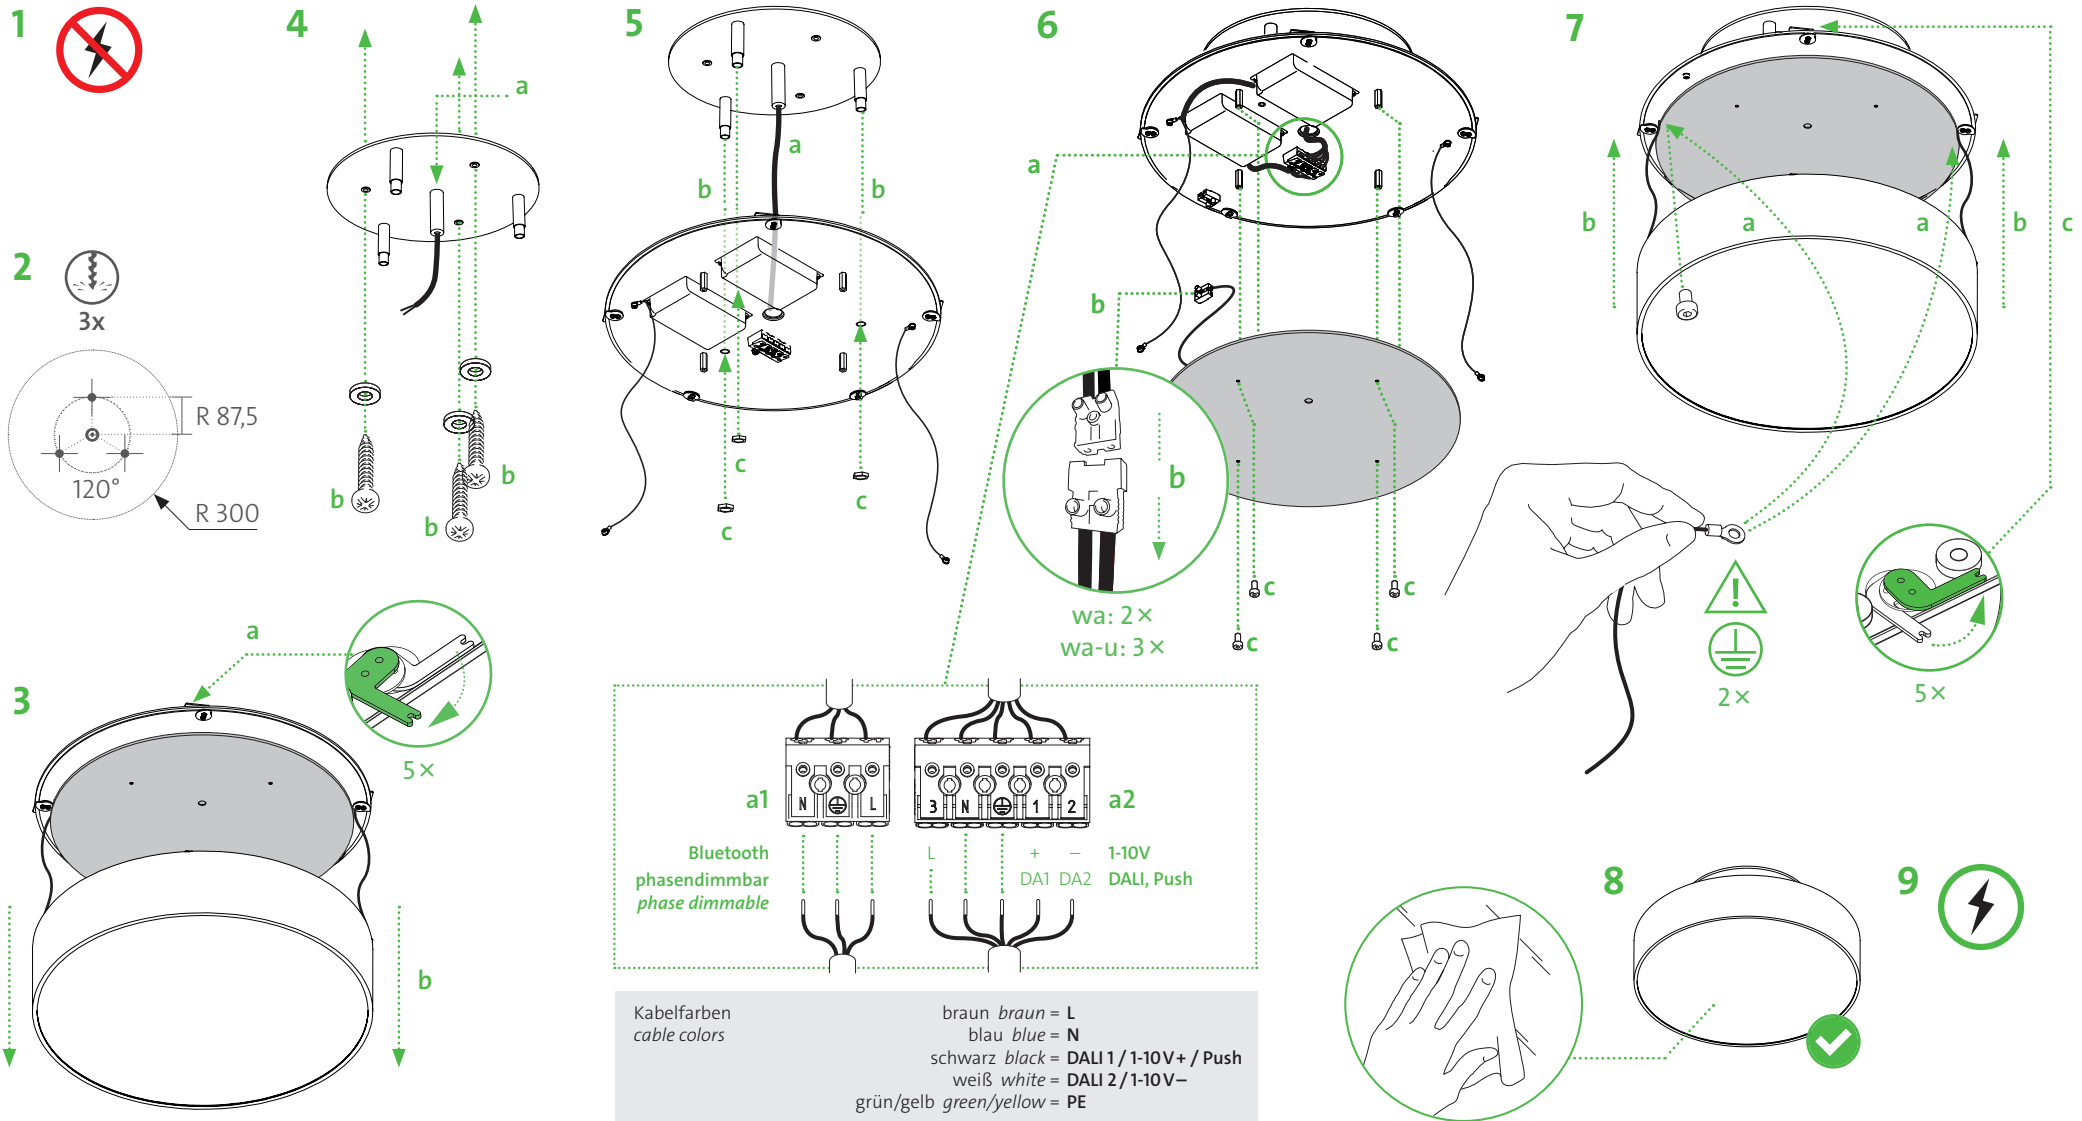


We are pleased that you have decided in a favour of mawa light.

bu6-600-G5-p/-p-u


PENDELLEUCHE PENDING LUMINAIRE

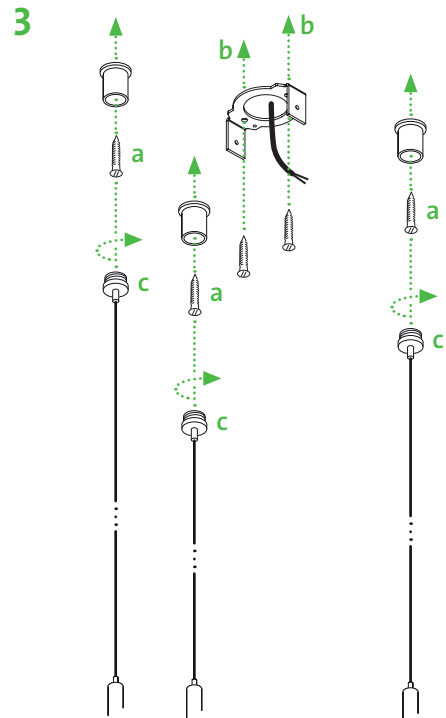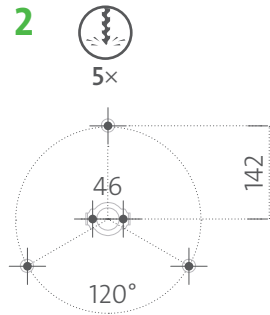


4

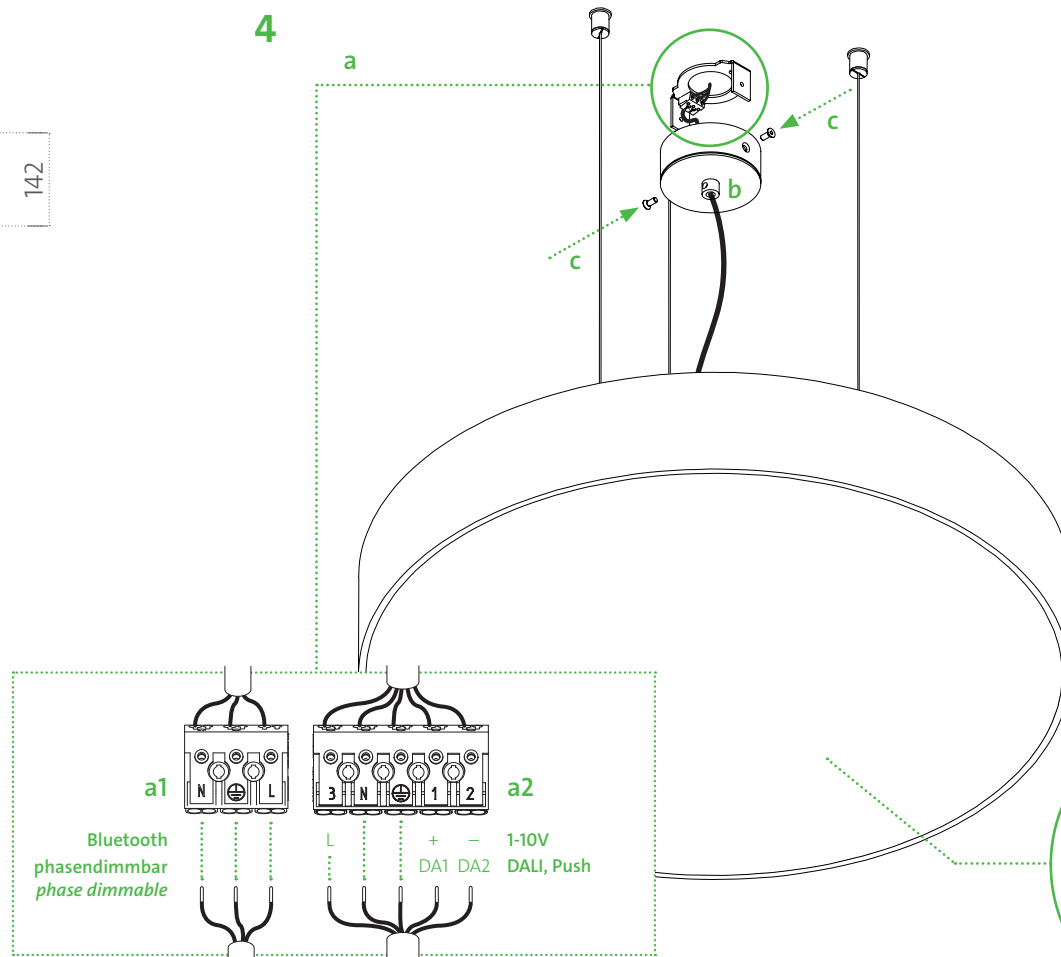

5



6

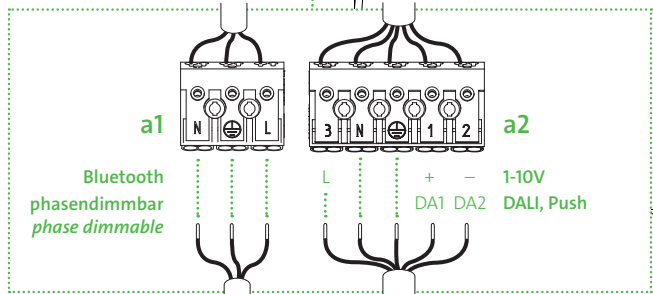

Kabelfarben cable colors	braun <i>braun</i> = L blau <i>blue</i> = N schwarz <i>black</i> = DALI 1 / 1-10V+ / Push weiß <i>white</i> = DALI 2 / 1-10V- grün/gelb <i>green/yellow</i> = PE
-----------------------------	--