ROOMOR WALL 3.0

06-Sep-2018

3.0 PAR16

max. 35W | GU10 | 100-240VAC | 50-60Hz

CE ⊕ IP20 ⟷ **45°/45°** ↻ **30°/30°**

BODY COLOUR

■	black texture *(Cable Plug with hand switch)*	339120B__
■	black texture *(Cable base round)*	339220B__

OPTIONAL

	No shade	00
	SHADE 1.0	
■	black texture	B1
■	black texture + gold	K1
■	felt grey *(max.15W)*	F1
	for PAR16 lamps see our catalogue	

SHADE 1.0

70

ø205

mount Shade:

base

lid

⑤

④

③ pull

② cable buckle

lower ring

45°   45°

30°

30°

⑥ *(Cable Plug with hand switch)*

⑥ *(Cable base round)*

DIMENSIONS

ø84   ø65   150   382

305

**ROOMOR
WALL 3.0**
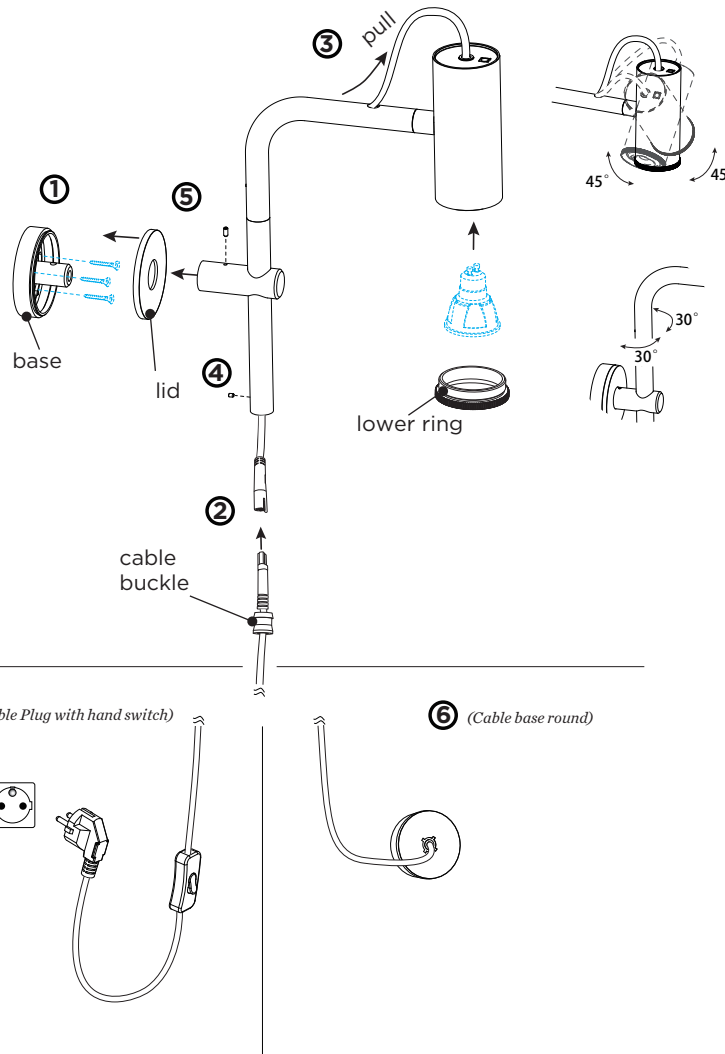
MOUNTING INSTRUCTION

① Open the lid, and mount the base on the wall.
and then close the lid by pressing.

② Connect the cable plugs.

③ Pull the cable up so that the connected plugs can get into the tube of the luminaire body.

④ Put inside by pressing and fix the cable buckle with the allen screw.

⑤ Install the luminaire body on the base and fix it with the allen screw

⑥ *for Cable Plug with hand switch:*
Power connected with the plug.

for Cable base round:
Mount the round base on the wall

(You have to turn the cover counterclockwise a quarter in order to loosen it from the base and mounting back on is by turning clockwise.)

POWER CONNECTION

Connect the wires
connection: STANDARD version

N
⏚
L

PB19-010-581-00

WEVER & DUCRÉ
LIGHTING

**INSTALLATION
INSTRUCTIONS**