



## io lettura datasheet

LED reading lamp with spherical head, movable in any direction thanks to Occhio 3D kinematics with two pivots set at an angle of 22.5° to each other; operation via heat-insulated grip pads; continuously adjustable in height from 120 cm to 150 cm. Lighting effect can be changed through optional inserts; dichroitic color filters can be additionally inserted. Power 13W or 18W (preselectable), switchable and dimmable by hand movement control via touchless sensor (can be deactivated). Power supply via plug mains adapter (converter); cable in the base can be rolled up. Surface combinations of head, pads, body and base can be configured as desired; pads changeable.



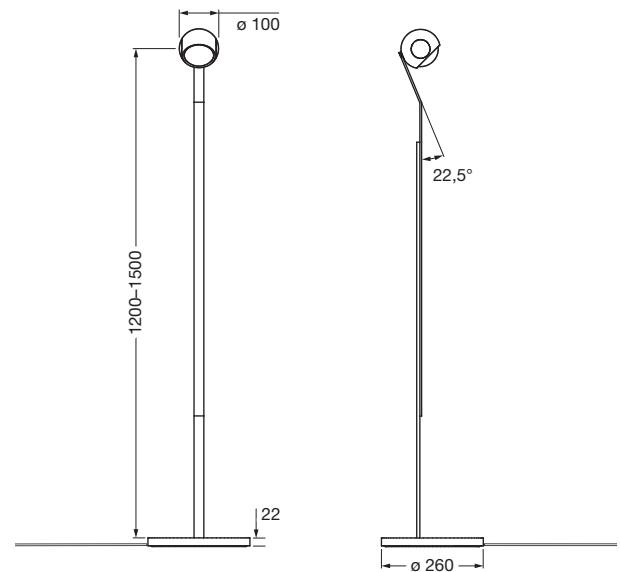

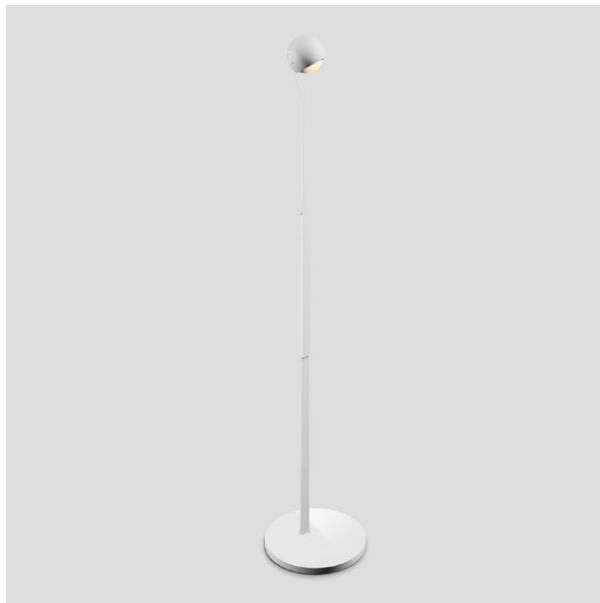
















Dimensions in mm



### technical data io lettura

properties	material	aluminium, zinc chrome-plated or painted, optical plastic, glass
	turning range head	360°
	turning range body	360° (with stop)
	weight	6.50 kg
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom
	pads	rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black
	body	shiny chrome, matt chrome, matt white, matt black
	base	shiny chrome, matt chrome, glossy white, matt white, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (63 lm / W)
	power	LED 18 W (incl. Occhio power supply unit approx. 22 W, standby < 0.5 W) / LED 13 W (incl. Occhio power supply unit approx. 15 W, standby < 0.5 W)
	color rendering index	perfect color; CRI Ra 97 high flux; CRI Ra 85
	color temperature (color consistency)	2700 K, 3000 K (2-step) 3000 K, 3500 K, 4000 K (2-step)
electricity	dimming	by integrated touchless sensor in head
	power supply unit	with integrated converter, cable length 180 cm
	power factor power supply (cos φ1)	0.9
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)
	permitted operating conditions	max. 30°C for indoor use only

## io lettura overview inserts



io head				
satinised glass				
soft edge glass				
fresnel lens				
color filter (optional, power of light source max. 13 W)				
lens				
				
	io C	io C with soft edge glass	io C with satinised glass	io C with fresnel lens

## io lettura lighting effects

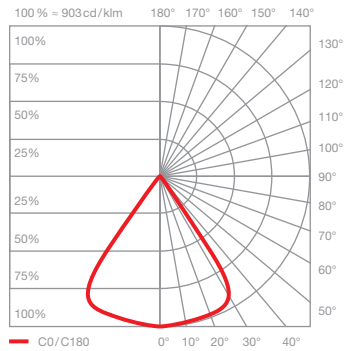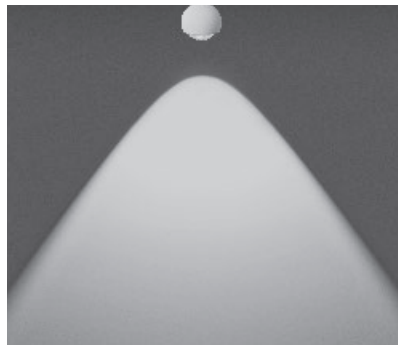



**io C**  
directed light (approx. 80°)

inserts:	lens		
luminous flux:	perfect color	18 W	1170 lm
	high flux	18 W	1610 lm
	perfect color	13 W	800 lm
	high flux	13 W	1170 lm

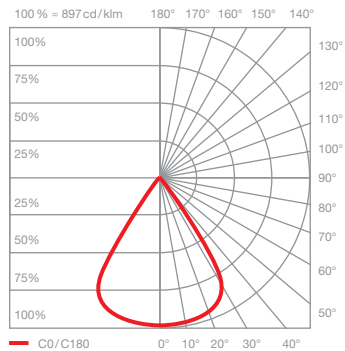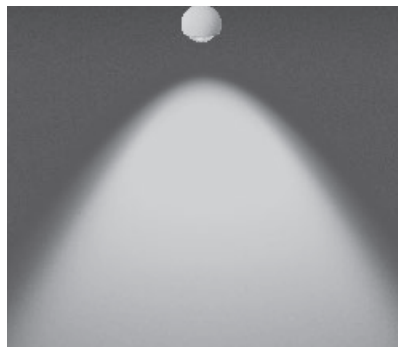



**io C with soft edge glass**  
directed light with soft contour of the beam angle (approx. 80°)

inserts:	lens soft edge glass		
luminous flux:	perfect color	18 W	1070 lm
	high flux	18 W	1470 lm
	perfect color	13 W	740 lm
	high flux	13 W	1070 lm

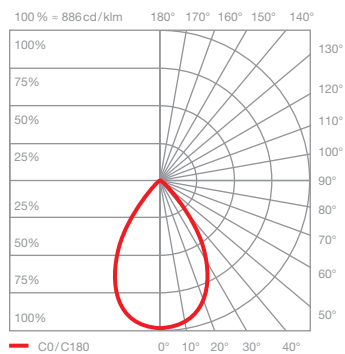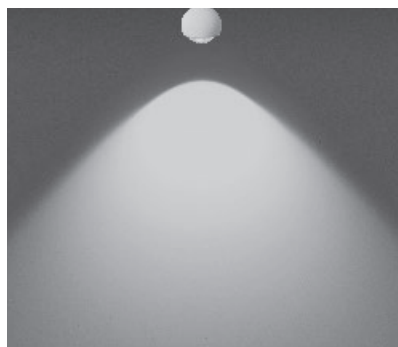

**io C with satinised glass**  
diffused light with soft widening of the beam angle (approx. 100°)

inserts:	lens satinised glass		
luminous flux:	perfect color	18 W	910 lm
	high flux	18 W	1250 lm
	perfect color	13 W	630 lm
	high flux	13 W	910 lm

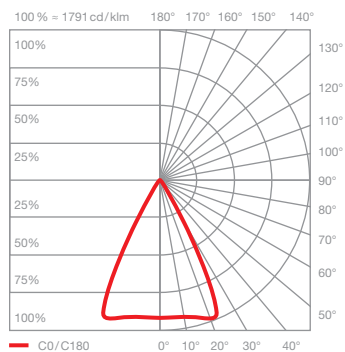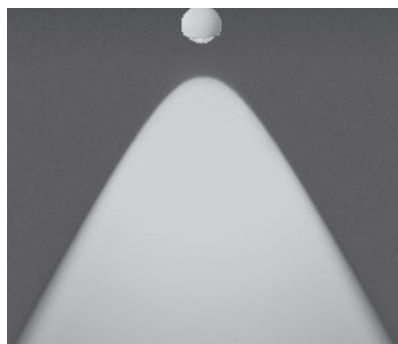

**io C with fresnel lens**  
bundled light  
beam angle approx. 60°

inserts:	lens fresnel lens		
luminous flux:	perfect color	18 W	990 lm
	high flux	18 W	1360 lm
	perfect color	13 W	680 lm
	high flux	13 W	990 lm